





CE-MARKERING

DOUBLE SWING GATE LOUVRES

DOUBLE SWING GATE LOUVRES

A louvered double swing gate offers a sleek and modern appearance that complements any location. The elegant horizontal louvres create a luxurious, closed design that provides both privacy and security. This way, you add elegance and protection to your entrance, without compromising on style.

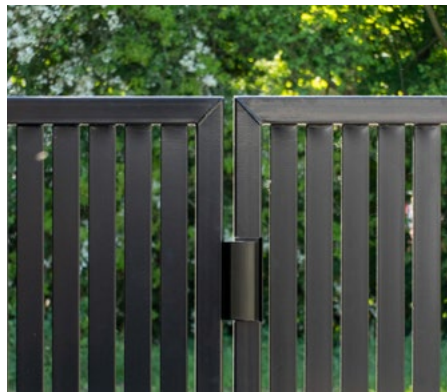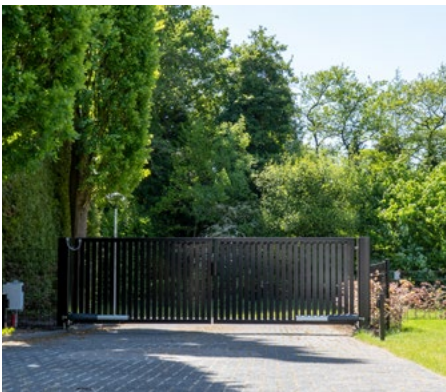

TECHNICAL SPECIFICATIONS

Gate frame: Box section 60x60 mm or 80x60 mm all around, mitre-welded at the corners.

Infill: Welded vertical box sections 50x10 mm or 80x20 mm, spacing approximately 60 mm.

Gate posts: Box section profile, extended by 900 mm for in-ground installation.

Wing height: Gate height minus 50 mm ground clearance.

Mesh connection: Optional.

Hinges: M20/M24 screw-in hinge or Locinox 180° hinge, 4-way adjustable.

Finish

Lock: Locinox Sixtylock built-in lock with strike plate, 2 aluminum cover plates for finishing the cylinder and handle set, and 1 standard handle set. Cylinder not included.

Drop bolts: Both gate leaves are fitted with internal drop bolts positioned at the rear. The gate leaf with the lock is standard equipped with a welded drop bolt bracket.

Surface treatment: Galvanized according to NEN-EN-ISO 1461.

Coating: Powder coating, standard Category 1, in accordance with NEN 5254.

OUR FENCING SYSTEMS ARE CE-CERTIFIED!

The sliding gates from HIS Gates fully comply with all European safety standards and are therefore CE-certified. Electric swing gates fall under the Machinery Directive MD 2006/42/EC, NEN-EN 13241, and NEN-EN 12453, ensuring that all potential hazards are properly safeguarded.

To prevent accidents, our gates meet the most stringent safety requirements and are equipped with the most reliable safety components. The CE certification guarantees that you have invested in a safe, compliant, and high-quality product.