



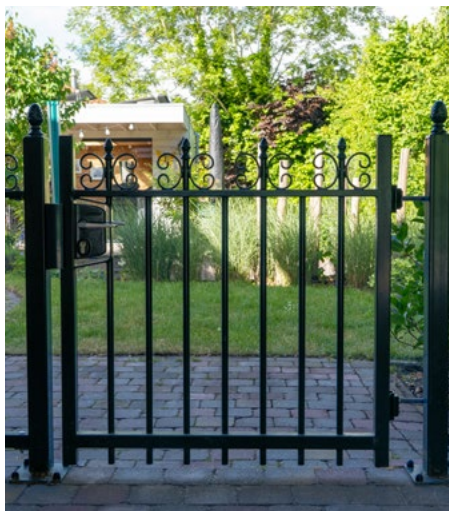

ORNEMENTAL FENCING STIRLING

ORNEMENTAL FENCING STIRLING

Safe and Elegant. HIS Stirling features graceful scrolls and child-safe bar spacing, making it not only visually appealing but also ideal for environments where safety is a top priority.

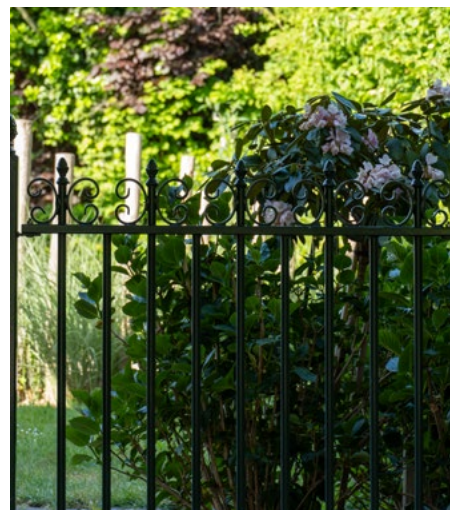

Technical Specifications

Horizontal Rails 40x20x2 mm with holes for through-inserted bars.

Bars Ø19 mm, standard spacing 110 mm center-to-center.

Bar Tops Standard fitted with welded pinecone-shaped finials.

Height Panel height plus 50 mm ground clearance.

Panel Width 1960 mm.

Posts 60x60 mm box sections with welded mounting brackets. The top of each post is sealed with a black plastic cap.

Optionally, posts can be fitted with a decorative post cap.

Finish

Installation Mounted using a bolt-and-nut connection.

Surface Treatment Standard hot-dip galvanized according to NEN-EN-ISO 1461.

Coating Powder coating available in all RAL colors (Category 1).

Fencing type Sterling	Panel Dimensions	Rail Dimensions	Bar section	Points	Posts
Sterling 80	1960 x 750 mm	40 x 20 mm	Ø19 mm	Nee	60 x 60 L = 1500 mm
Sterling 100	1960 x 950 mm	40 x 20 mm	Ø19 mm	Nee	60 x 60 L = 1800 mm
Sterling 125	1960 x 1200 mm	40 x 20 mm	Ø19 mm	Nee	60 x 60 L = 2000 mm
Sterling 150	1960 x 1450 mm	40 x 20 mm	Ø19 mm	Ja, 45°	60 x 60 L = 2300 mm



Sphere ø30 mm



HP112



HP132



HP291