




TUBULAR FENCING QUADRO 25

TUBULAR FENCING QUADRO 25

Minimalist and Sleek. Quadro 25 is a modern bar fence with a clean design, featuring no visible clamps or bolts. The through-inserted bars provide extra strength and rigidity. This model is perfect for those seeking a contemporary, low-maintenance fencing solution.

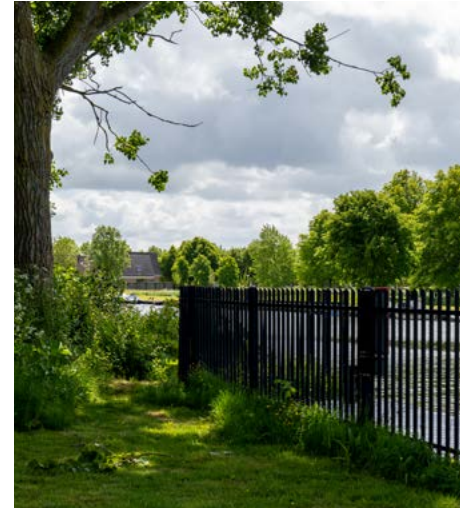

Technical Specifications

Horizontal Rails 60x40x2 mm with holes for through-inserted bars.

Bars 25x25 mm box sections.

Standard bar spacing: 150 mm center-to-center. From a height of 1500 mm, bars are cut at a sharp 45° angle.

Height Panel height plus 50 mm ground clearance.

Panel Width 2960 mm.


Posts 60x60 mm box sections with pre-drilled holes for concealed or bracket connections. The top of each post is sealed with a black plastic cap.

Finish

Installation Each post is equipped with two transverse holes, allowing two bar panels to be connected using a bolt and nut.

Surface Treatment Standard hot-dip galvanized according to NEN-EN-ISO 1461.

Coating Powder coating available in all RAL colors (Category 1).

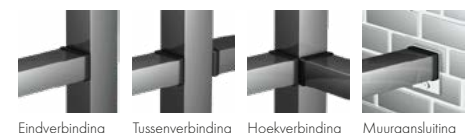

Eindverbinding Tussenverbinding Hoekverbinding Muuraansluiting

Fence type Quadro 25	Panel Dimensions	Rail Dimensions	Bar box section	Points	Posts
Quadro 80	2940 x 750 mm	60 x 40 mm	25 x 25 mm	No	60 x 60 L = 1500 mm
Quadro 100	2940 x 950 mm	60 x 40 mm	25 x 25 mm	No	60 x 60 L = 1900 mm
Quadro 120	2940 x 1200 mm	60 x 40 mm	25 x 25 mm	No	60 x 60 L = 2100 mm
Quadro 150	2940 x 1450 mm	60 x 40 mm	25 x 25 mm	Yes, 45°	60 x 60 L = 2400 mm
Quadro 180	2940 x 1750 mm	60 x 40 mm	25 x 25 mm	Yes, 45°	60 x 60 L = 2700 mm
Quadro 200	2940 x 1935 mm	60 x 40 mm	25 x 25 mm	Yes, 45°	60 x 60 L = 2900 mm
Quadro 250	2940 x 2370 mm	60 x 40 mm	25 x 25 mm	Yes, 45°	60 x 60 L = 3400 mm