



# TUBULAR FENCING **HIS**

# TUBULAR FENCING HIS

HIS is a solid bar fence with a neutral, professional appearance. Thanks to its sharp spike rail and nearly invisible connections between panels and posts, this fencing system provides reliable security without compromising the visual appeal of your property.




## Technical Specifications

**Horizontal Rails** 50x25 mm or 40x40 mm, with bars drilled and welded into the profile.  
**Bars** For heights up to 2500 mm, bar diameter Ø25 mm.  
 Standard bar spacing: 150 mm center-to-center (other spacings available upon request).  
**Spike Rail** From a height of 1500 mm, the fence is standard equipped with a sharp spike rail (35 mm).  
**Height** Panel height plus 50 mm ground clearance.  
**Panel Width** 2980 mm.  
**Posts** Robust 60x60 mm posts with pre-drilled holes for bolted connections. The top of each post is sealed with a black plastic cap.

## Finish

**Installation** Each post is equipped with two transverse holes, allowing two bar panels to be connected using a bolt and nut.  
**Vandal-Resistant Option** Stainless steel break nut available to prevent disassembly (optional).  
**Fasteners** All fastening materials are made of stainless steel.  
**Surface Treatment** Standard hot-dip galvanized according to NEN-EN-ISO 1461.  
**Coating** Powder coating available in all RAL colors (Category 1).

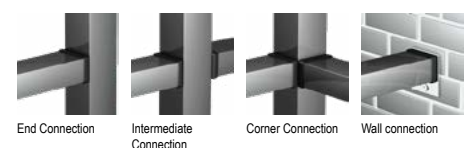

Tubular fence type HIS	Panel Dimensions	Rail Dimensions	Bar Diameter	Razer comb 35 mm	Posts
HIS 80	2940 x 750 mm	50 x 25 mm	Ø 25 mm	No	60 x 60 L = 1500 mm
HIS 100	2940 x 950 mm	50 x 25 mm	Ø 25 mm	No	60 x 60 L = 1900 mm
HIS 120	2940 x 1200 mm	50 x 25 mm	Ø 25 mm	No	60 x 60 L = 2100 mm
HIS 150	2940 x 1450 mm	50 x 25 mm	Ø 25 mm	Yes	60 x 60 L = 2400 mm
HIS 180	2940 x 1750 mm	50 x 25 mm	Ø 25 mm	Yes	60 x 60 L = 2700 mm
HIS 200	2940 x 1950 mm	50 x 25 mm	Ø 25 mm	Yes	60 x 60 L = 2900 mm
HIS 250	2940 x 2370 mm	50 x 25 mm	Ø 25 mm	Yes	60 x 60 L = 3400 mm