




TUBULAR FENCING QUADRO 30

TUBULAR FENCING QUADRO 30

Minimalist and Sleek. Quadro 30 is a modern bar fence with a clean design, featuring no visible clamps or bolts. The through-inserted bars provide extra strength and rigidity. This model is perfect for those seeking a contemporary, low-maintenance fencing solution.

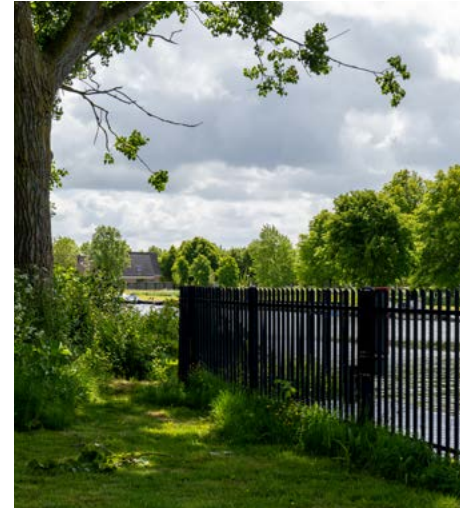

Technical Specifications

Horizontal Rails 60x40x2 mm with holes for through-inserted bars.

Bars 30x30 mm box sections.

Standard bar spacing: 170 mm center-to-center. From a height of 1500 mm, bars are cut at a sharp 45° angle.

Height Panel height plus 50 mm ground clearance.

Panel Width 3000 mm.


Posts 70x70 mm box sections with pre-drilled holes for concealed or bracket connections. The top of each post is sealed with a black plastic cap.

Finish

Installation Each post is equipped with two transverse holes, allowing two bar panels to be connected using a bolt and nut.

Surface Treatment Standard hot-dip galvanized according to NEN-EN-ISO 1461.

Coating Powder coating available in all RAL colors (Category 1).

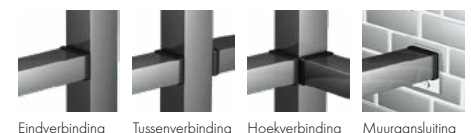

Eindverbinding

Tussenverbinding

Hoekverbinding

Muuraansluiting

Fence type Quadro 30	Panel Dimensions	Rail Dimensions	Bar Box Section	Points	Posts
Quadro 80	3000 x 750 mm	60 x 40 mm	30 x 30 mm	No	70 x 70 L = 1800 mm
Quadro 100	3000 x 950 mm	60 x 40 mm	30 x 30 mm	No	70 x 70 L = 2000 mm
Quadro 120	3000 x 1200 mm	60 x 40 mm	30 x 30 mm	No	70 x 70 L = 2200 mm
Quadro 150	3000 x 1450 mm	60 x 40 mm	30 x 30 mm	Yes, 45°	70 x 70 L = 2500 mm
Quadro 180	3000 x 1750 mm	60 x 40 mm	30 x 30 mm	Yes, 45°	70 x 70 L = 2800 mm
Quadro 200	3000 x 1935 mm	60 x 40 mm	30 x 30 mm	Yes, 45°	70 x 70 L = 3000 mm
Quadro 250	3000 x 2370 mm	60 x 40 mm	30 x 30 mm	Yes, 45°	70 x 70 L = 3400 mm